

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 :

H04M 11/00

A1

(11) International Publication Number:

WO 96/19891

(43) International Publication Date:

27 June 1996 (27.06.96)

(21) International Application Number: PCT/US95/16011

(22) International Filing Date: 19 December 1995 (19.12.95)

(30) Priority Data:

08/361,803

21 December 1994 (21.12.94) US

(71) Applicant: STANFORD TELECOMMUNICATIONS, INC.  
[US/US]; 1761 Business Center Drive, Reston, VA 22090  
(US).

(72) Inventors: CUNNINGHAM, Kenneth; #5 Bently Drive, Ster-  
ling, VA 22170 (US). SCHUCHMAN, Leonard; 11054  
Seven Hill Lane, Potomac, MD 20854 (US).

(74) Agent: ZEGER, Jim; 801 North Pitt Street, #108, Alexandria,  
VA 22314 (US).


(81) Designated States: AU, BR, CA, JP, KR, MX, European patent  
(AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE).

Published

With international search report.

With amended claims.

(54) Title: POSITION ENHANCED CELLULAR SYSTEM

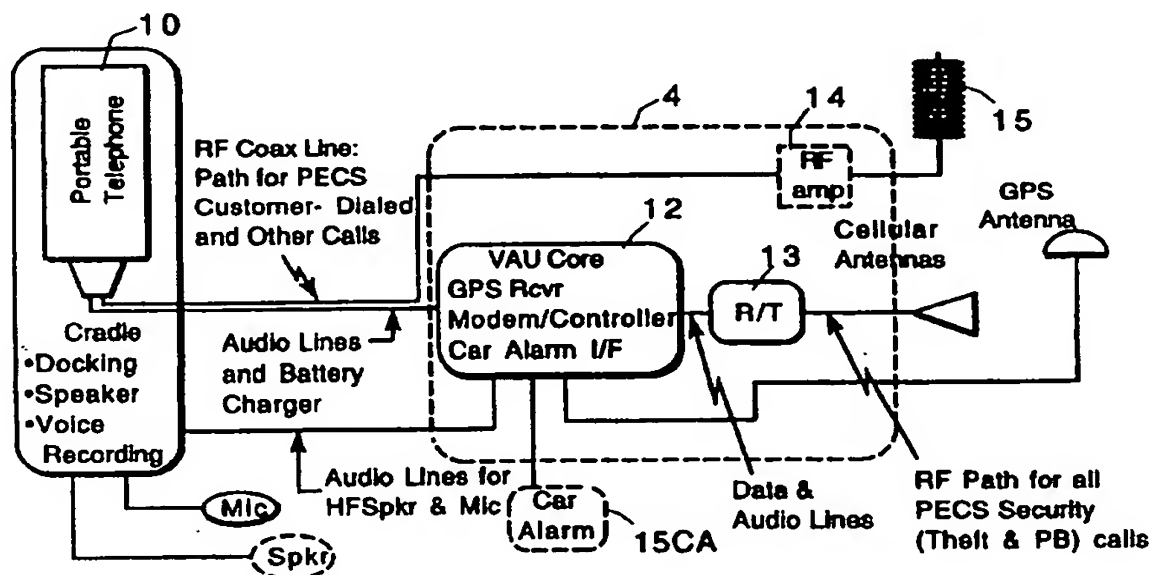

(57) Abstract

A position enhanced cellular telephone system wherein a cellular telephone device incorporates an RF position finder facility (12), a data modem (12) and controller (12) and a car alarm device (15CA), having a system for flexibly merging the functionality of the telephone device (10), position finder facility (12), data modem (12), controller (12), and car alarm (15CA), reduce overall components and lower cost.

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## POSITION ENHANCED CELLULAR SYSTEM

BACKGROUND AND BRIEF DESCRIPTION OF THE INVENTION:

The present invention integrates many elements of a Position Enhanced Cellular Telephone System (PECS) and user equipment (i.e., the vehicle applique unit VAU) into a single unit with improved performance characteristics and reduced unit cost. A VAU core includes GPS (or other broadcast) receiver circuitry for position location, a modem, a controller and an alarm interface. Additional cellular telephone interfaces for communicating via a cellular telephone channel are included.

The above referenced related applications disclose the position enhanced cellular telephone system (PECS). The objects of the present invention are to provide a PECS system, merge the cellular telephone and VAU core, accommodate both mobile and portable telephones, improve overall performance, and reduce and significantly lower unit cost.

Another object of the invention is to provide a system for enhancing the performance of a .6 Watt portable phone when used

inside an automobile. This is achieved by use of a linear amplifier of appropriate gain and power level to compensate for RF losses, typically incurred by portables used in the automotive environment. Adjustments in power, as directed by the cellular network controller, are left to the portable telephone itself. The Integrated Unit, while described under the context of portable phones, is equally useful when applied as a part of a "mobile only" system.

Another object of the invention is provided by the architecture of the Integrated Unit which is transferable to forms of radio communication other than cellular telephone. For example, terrestrial/satellite based PCS, pagers, mobile radio and other emerging communication standards could be implemented with this architecture.

A further object of the invention is to provide additional RF switches inside the Integrated Unit for the purpose of selecting between dual cellular or GPS antennae.

A further object of the invention is to provide an integrated cellular transceiver VAU core which offers the following features: 1) voice-only operation, 2) data-in-voice operation, 3) data-only operation, 4) voice and message recording/playback, 5) interfaces to car alarms and vehicular data buses, and 6) enhanced portable phone performance.

Still a further object of the invention is to provide integrated cellular transceiver/VAU core units which can be used (without monthly billing) by leaving it in the "off" state until

such time that a call is made to a service center. The call can be billed at a special roaming rate.

**DESCRIPTION OF THE DRAWINGS:**

The above and other objects, advantages and features of the invention will become more apparent when considered with the following specification and accompanying drawings wherein:

FIG. 1 is a block diagram of a PECS adaptor system for portable cellular telephones in vehicles;

FIG. 2 is a block diagram of an integrated VAU/transceiver for portable and mobile cellular telephone devices; and

FIG. 3 is a more detailed block diagram of the integrated cellular transceiver/VAU core.

**DETAILED DESCRIPTION OF THE INVENTION:**

The above reference to related applications discloses a new approach for providing PECS services to the user community. This approach enables users to employ their portable telephone as an integral part of the PECS in-vehicle equipment. Figure 1 illustrates a PECS equipment group capable of using a portable phone 10 as the primary means of accessing PECS services. Note that Fig. 1 shows components as disclosed in the above-related application being used to compose the system. In particular, there is a set of elements in the dotted block 11 that are essential to PECS. These are the VAU Core 12, the Cellular Transceiver (R/T) 13, and an RF Amplifier 14.

The VAU Core 12 contains the circuitry and firmware necessary for providing the PECS overlay onto cellular telephone

10. The unit supports routine operation of the cellular telephone, car alarm 15, and other accessories under normal conditions but is capable of providing automatic control under select conditions. The VAU Core 12 has the following composition:

- 1) Baseband Audio Processor (Configurable for data-in-voice, data-only and voice-only operation).
- 2) Hands-free Audio Controller.
- 3) Core Microcontroller.
- 4) Power Supply.
- 5) Interfaces - cellular telephone, car alarm, automotive, antennae, etc.
- 6) GPS Receiver circuits.

The R/T 13 is equivalent to a mobile telephone transceiver. This device is compatible with regional phone service (e.g., FM (AMPS), TDMA, and/or CDMA in the U.S.). In general, the R/T 13 has the following composition:

- 1) RF Amplifiers.
- 2) Receive/Transmit RF Front End (includes gain control, tuning, filtering, etc.)
- 3) R/T Microcontroller.
- 4) Baseband Audio Processor.
- 5) Hands-free Audio Controller.
- 6) Power Supply.
- 7) Interfaces - cellular telephone, automotive, antenna, etc.

The RF Amplifier 14 provides a "boost" to RF signal strength (in both the transmit and receive directions). This is desired since operation of a portable phone in automobile is subject to signal attenuation resulting in degraded performance. By providing a simple linear "booster", it is possible to compensate for losses experienced in the automobile and achieve an RF signal strength at antenna 15 equal to that which would have been achieved by a path outside the automobile. The amplifier is composed of RF amplifiers, filters, isolators, power splitters, and switches.

When elements listed above are examined, it is possible to identify significant redundancy and overlap in their composition. For instance, the core 12 and the R/T 13 both require audio baseband processing, hands-free operation, general control and common interfaces. In a similar manner, the RF amplifier 14 overlaps the R/T. The invention provides an integrated unit that shares its resources while providing the functional equivalence of individual components. Fig. 2 depicts such a system.

Figure 3 is a block diagram for an integrated cellular RT/VAU Core. According to the invention, this device is capable of satisfying R/T, VAU Core and RF Amplifier requirements within a single unit. A common amplification stage 30 (from the RF Port to the Switches 31-T, 31-R) serves both the R/T and the portable booster. Note that the portable's amplification must be in the .6 Watt range while the R/T may be designed for either .6 or 3 Watt operation. Following the amplification stage 30 and

transmit and receive switches 31-T and 31-R (controlled by microprocessor 39) comes signal conversion from RF to baseband (and vice versa). This conversion involves transmit and receive bandpass filtering  $BPF_T$  and  $BPF_R$ , respectively, tuning upconverter 32 which is connected to an oscillator  $LO_T$  and downconverter 33 which is connected to local oscillator  $LO_R$ , filtering 34, 35, gain control (not shown), low pass filtering 34<sub>T</sub> and 35, and digitization 36<sub>T</sub> and 37<sub>R</sub>. Implementation of this circuitry may be achieved with conventional components or Charge-Coupled Device (CCD) technology. Furthermore, by making the CCD device and filters programmable, it is possible to serve multiple cellular modulation protocols (i.e., FM, TDMA, and/or CDMA).

A Digital Signal Processor (DSP) 38 serves as the baseband signal processor. This may be a programmable or fixed device with volatile and non-volatile memory. The DSP 38 performs several telephone and PECS functions including:

- DTMF Generator/Detector

- Volume Control

- Filtering

- Switching

- Data Modem

- Data-in-Voice Modem

- Telephone Signal processing for digital protocols

- Hands-free audio processing

- Voice storage/playback



Overall control of the Integrated Unit is provided by the Microcontroller 39. This is a processor with volatile and non-volatile memory that directs telephone and VAU Core operation according to their prescribed protocols. This device interfaces/services the GPS receiver, car alarm and other external elements (e.g., phone handset, smart portable cradle, etc.) Microprocessor/controller 39 performs the following functions:

Telephone functions per established cellular telephone protocols

VAU functions

Interfaces:

Mobile handset

Car alarm

GPS

RF of portable

Cradle

Hands-free speaker and microphone

A plurality of input/output ports P-N are provided to allow a great degree of flexibility in user options as follows:

Port P1 is the RF port for coupling RF to and from an external antenna via diplexer 50.

Port P2 is the RF port for the portable telephone.

Port P3 is the portable transmit hands-free (H/F) output port.

Port P4 is the portable receiver hands-free input.

Port P5 is for an optional voice output from the optional handset (not shown) of the mobile R/T 13 shown in Fig. 1.

Port P6 is for coupling microphone input (Fig. 2).

Port P7 is for coupling to an output speaker (Fig. 2).

Port P8 is for an optional voice output to an optional handset (not shown).

Port P9 is for a connector to a GPS antenna (which may be hidden or concealed on a vehicle).

Port P10 is a data bus for inputting and outputting data to other terminal devices such as a display, recorder, etc., from microprocessor 39.

Port P11 is coupled to the car alarm 15 interface.

Port P12 is for inputting a boost select signal to boost the RF power by RF amplifier 14 for portable 10.

Port P13 can be used for a variety of power controlled devices such as ignition (to shut-off the ignition or activate the horn or other audible alarm, in case of theft).

The invention features the following:

1) An integrated unit that merges the functionality of an R/T, VAU core, and RF amplifier booster, reduces overall component count and dramatically lowers unit cost.

2) An approach for enhancing the performance of a .6 Watt portable phone in an automobile by compensating for RF losses experienced within the automobile. The approach uses a linear amplifier of appropriate gain and power level to compensate for

losses. Adjustments in power, as directed by the cellular network controller, are left to the portable phone itself.

3) The integrated unit, while described under the context of portable phones, is equally useful when applied as a part of a "mobile only" system.

4) The architecture of the integrated unit is transferable to forms of communication other than cellular telephones. For example, terrestrial/satellite based PCS, pagers, mobile radio and other emerging communication standards could be implemented with this architecture.

5) Additional RF switches could be added inside the integrated unit for the purpose of selecting between dual cellular or GPS antennae.

6) The integrated unit offers the following features:

- voice-only operation,
- data-in-voice operation,
- data-only operation,
- voice and message recording/playback,
- interface(s) to car alarms, and
- enhanced portable phone performance.

7) It is possible to use the integrated unit (without monthly billing) by leaving it in the "off" state until such time as a call is made to a service center. The cell will be billed at a special roaming rate.

## CLAIMS

1. In a position enhanced cellular telephone system wherein a cellular telephone device incorporates an RF or other position finder facility, a data modem and controller and a car alarm device, the improvement for flexibly merging the functionality of said telephone device, position finder facility, data modem, controller, and car alarm, reduce overall components and lower the cost, comprising:

a microprocessor having memories, and a plurality of data input and output terminals,

means to couple position signals from said RF or other type of position finder facility to an input terminal on said microprocessor,

means to couple signals from said car alarm to an input terminal of said microprocessor,

a signal conversion circuit for converting RF to baseband and vice versa, and switch means controlled by said microprocessor for coupling RF signals to and from said cellular telephone device to said signal conversion circuit,

a digital signal processor (DSP) coupled to said microprocessor and controlled thereby,

a microphone and a speaker connected to said DSP, and

means coupling said DSP to said signal conversion circuit.

While exemplary preferred embodiments of the invention have been described and illustrated, it will be appreciated that various other embodiments, adaptations, additions and modifications will be readily apparent to those skilled in the art without departing from the spirit and scope of the invention.

WHAT IS CLAIMED IS:

2. The position enhanced cellular telephone system defined in claim 1 wherein said cellular telephone device includes a portable cellular telephone unit and a hands-free means for causing said portable cellular telephone to be coupled to said signal conversion circuit at baseband level for processing thereby.

3. The position enhanced telephone system defined in claim 1 or claim 2, including a linear amplifier within the integrated unit to provide a power boost for the portable RF in order to compensate for losses.

## AMENDED CLAIMS

[received by the International Bureau on 27 May 1996 (27.05.96);  
original claim 1 amended; remaining claims unchanged (2 pages)]

1. In a position enhanced cellular telephone system wherein a cellular telephone device incorporates an RF position finder facility, a data modem and controller and a car alarm device, the improvement for flexibly merging the  
5 functionality of said telephone device, RF position finder facility, controller, and car alarm, reduce overall components and lower the cost, comprising:

a microprocessor having memories, and a plurality of data input and output terminals,

10 means to couple position signals from said RF type of position finder facility to an input terminal on said microprocessor,

means to couple signals from said car alarm to an input terminal of said microprocessor,

15 a signal conversion circuit for converting RF to baseband signals and vice versa, and switch means controlled by said microprocessor for coupling RF signals to and from said cellular telephone device to said signal conversion circuit,

20 a baseband digital signal processor (DSP) coupled to said microprocessor and controlled thereby for performing selected telephone functions, including data-in-voice modem and data modem functions on said baseband signals,

a microphone and a speaker connected to said DSP, and  
25 means coupling said DSP to said signal conversion circuit.

2. The position enhanced cellular telephone system defined in claim 1 wherein said cellular telephone device includes a portable cellular telephone unit and a hands-free means for causing said portable cellular telephone to be  
5 coupled to said signal conversion circuit at baseband level for processing thereby.

3. The position enhanced telephone system defined in claim 1 or claim 2, including a linear amplifier within the integrated unit to provide a power boost for the portable RF  
10 in order to compensate for losses.



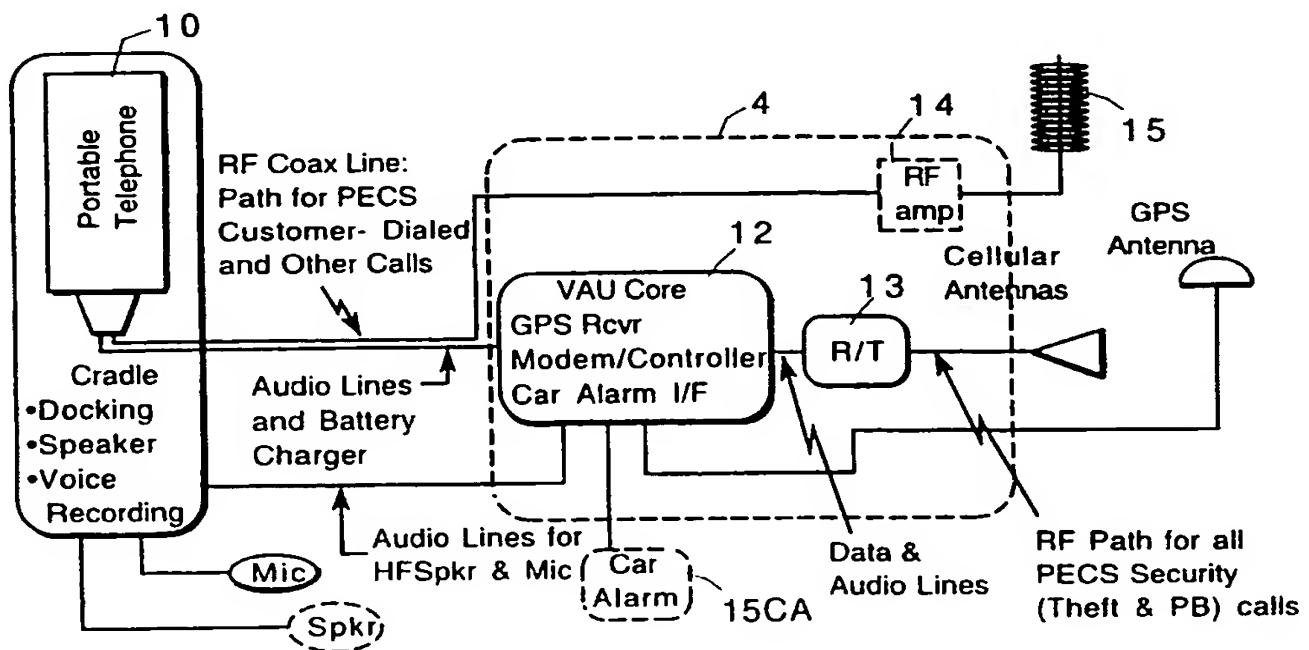


FIG. 1

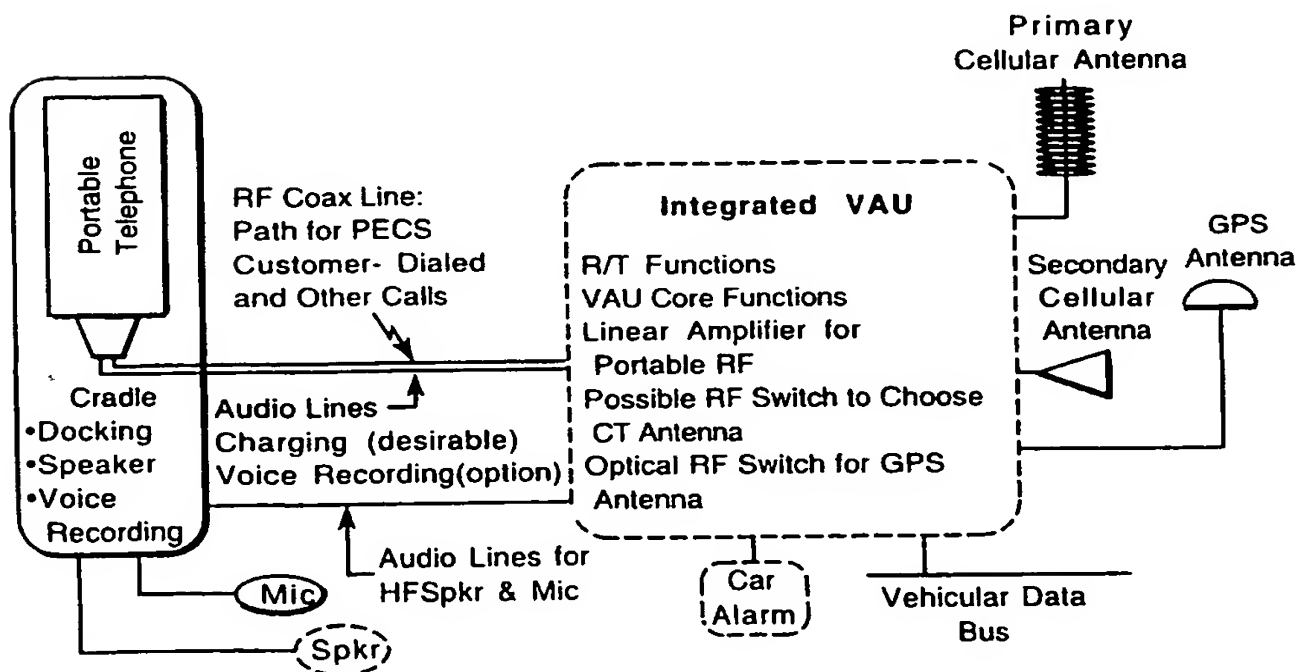


FIG. 2

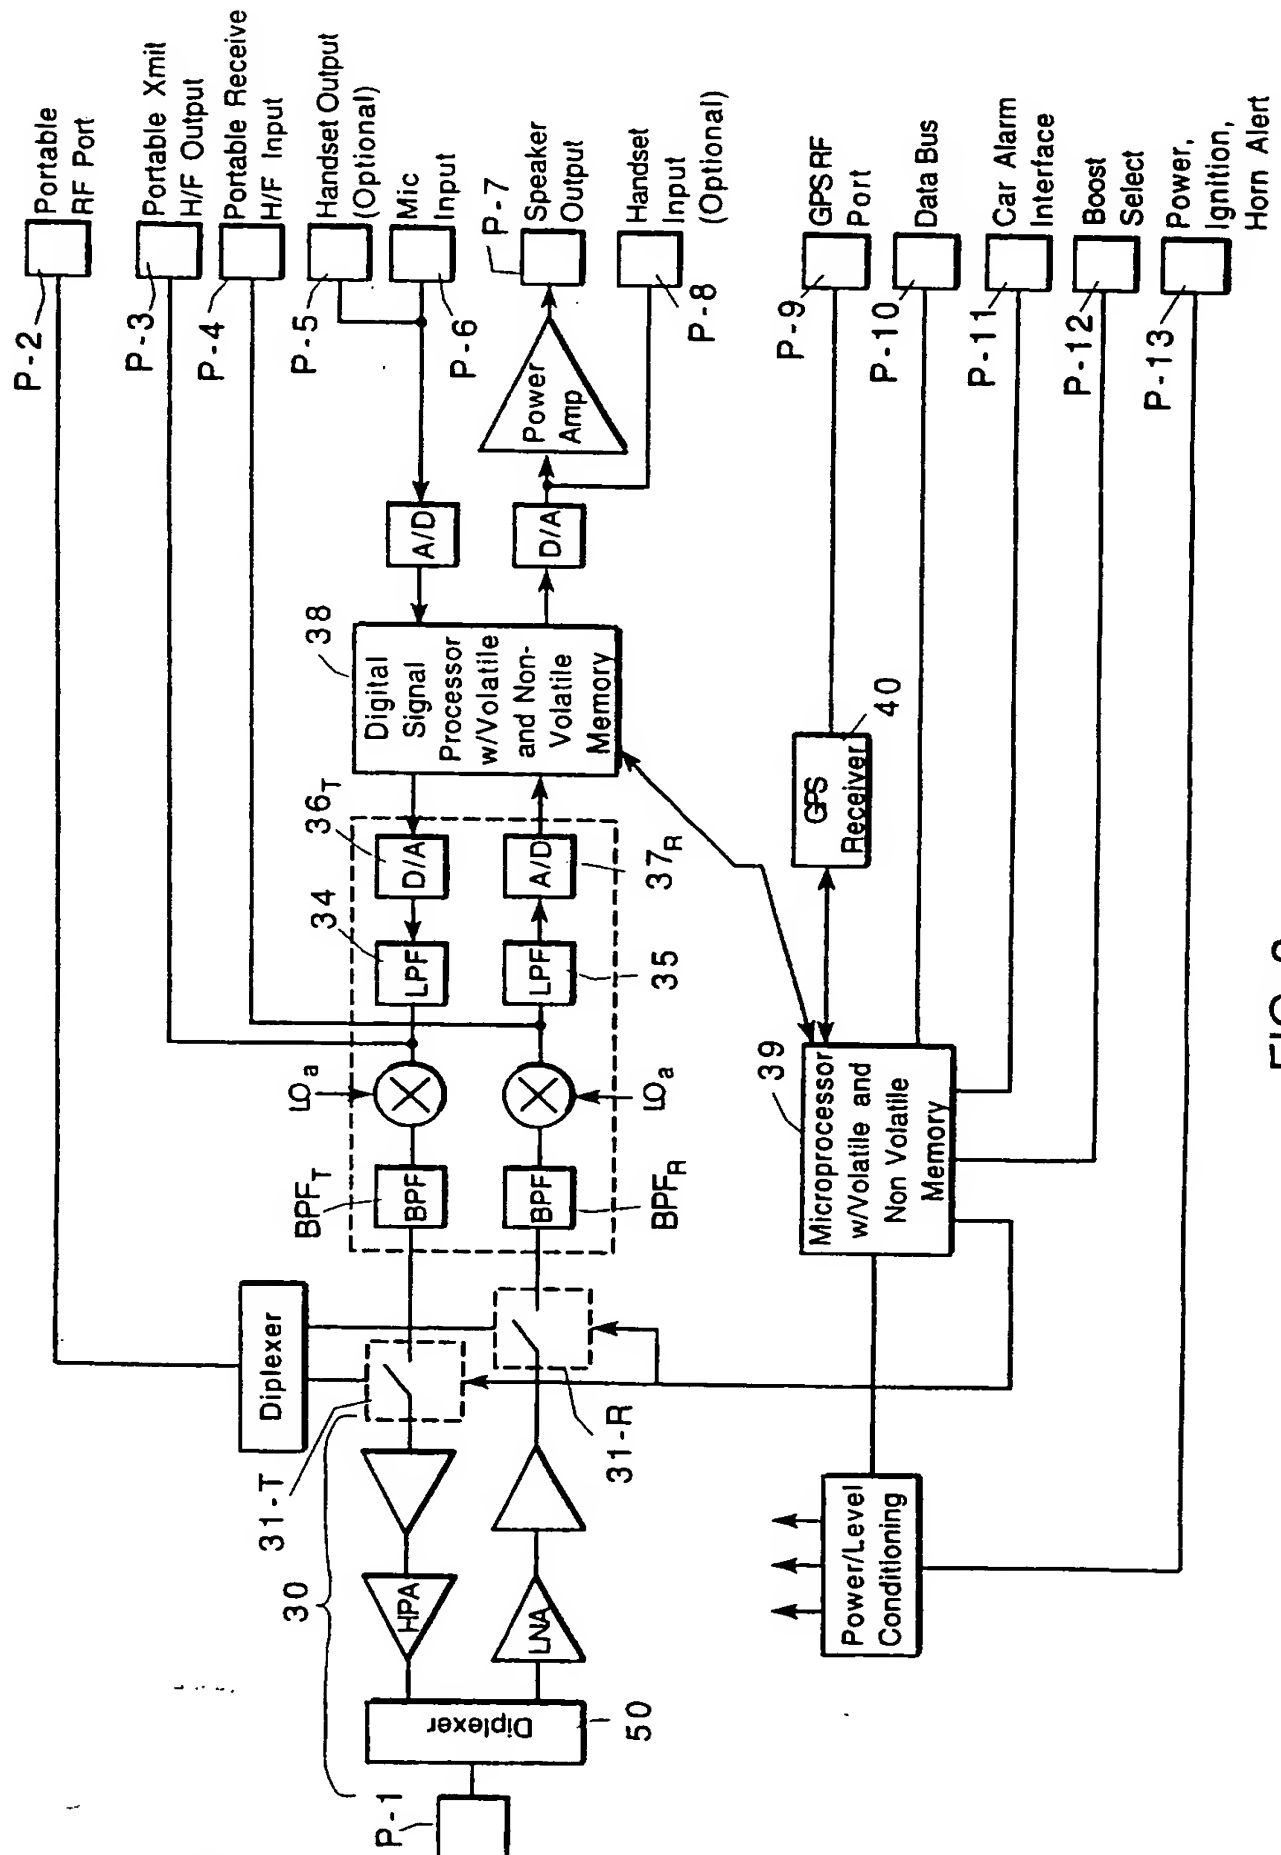


FIG. 3

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US95/16011

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04M 11/00

US CL : 379/58

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 340/990; 364/460; 379/58;

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Please See Extra Sheet.

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US, A, 4,905,271 (NAMEKAWA) 27 February 1990, figure 1, column 2, lines 48-68.	1-3
Y	US, A, 5,155,689 (WORTHAM) 13 October 1992, figure 2.	1-3
X	US, A, 5,334,974 (SIMMS ET AL) 02 August 1994, figure 4.	1-3
Y	US, A, 5,335,264 (NAMEKAWA) 02 August 1994. see entire document.	1-3



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

05 MARCH 1996

Date of mailing of the international search report

25 MAR 1996

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer.

WILLIAM DENNIS CUMMING

Telephone No. (703) 305-4394

Joni Hill

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US95/16011

## B. FIELDS SEARCHED

Electronic data bases consulted (Name of data base and where practicable terms used):

APS: cellular telephone system, modem, position, alarm, microprocessor, terminals, position signals, input terminal, car alarm, signal conversion, switch, RF signals, digital signal processor, DSP, microphone

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**This Page Blank (uspto)**